

# Paging Interface Adapter PIA3264

comPPage's **PIA** is a 21<sup>st</sup> Century State of the Art Processor based interface unit with features **ONLY** offered by comPPage. With Storage of 1GB on a SD card that can be transferred to a PC. The **PIA** can be programmed using a stand alone PC with an Ethernet card or via the Local Area Network or Internet. The Paging Interface Adapter allows connection to Host units that output Dry Contact closure – N/o or N/C, Voltage output – High or Low, up to 64 inputs per unit with the ability to connect 8 additional units of 64 each using RS485. The unit also supports two rates of pulsing inputs. You can setup Voltage or Dry contact input. The **Paging Interface Adapter** uses a Web Based programming interface. No software to Load. Stores all alarm logs, reports, and contact program information on a 1GB removable SD Micro card. Reports include Elapse time for each alarm. The Paging Interface Adapter is **Designed** and **Manufactured** in the **US** and carries a **LIMITED LIFE TIME WARRANTY**. You only need to purchase Once.

---

**Programming interface** – Web Browser with Connection to Local Area Network, Direct Connect to Unit or Internet connect using TCP/IP. Enter new data, Find and Edit current data. Print Reports.

**Setup Options** - Paging Protocol – Scope, Motorola Tap V1.8, WaveWare  
Motorola Comp2 (with and without Alert Type)  
Pulsing Input – AiPhone, Cornell, Engineered Electronics, Heritage Medcall  
Tektone.  
Inputs – Voltage High or Low and Non-Voltage Normally Open and Closed  
Escalation Level – 1 per Level of call.  
Shifts – 3  
Global Pager ID – Two  
Slave Units – 0, 1- 8  
Output – Paging, Paging and Monitoring  
System Health Check and Time Period 2,5,15 minutes, 1 or 2 hours

**Contact Input** - 16 inputs standard, addition inputs in block of 4.  
Total Contact Input - 576  
Voltage, Non-Voltage or Mixed  
Voltage Input 6 – 50 Volts AC/DC  
Fused Input Protection for Non-Voltage input

**Contact Program** - Individual Pager ID or Group ID  
Individual Repeats and Intervals or Repeat till Reset  
4 Messages – Alert, Pulsing 1, Pulsing 2, Reset  
Maximum of 240 Characters per message  
Shift Schedule Pager ID

**Storage** – Log all alarms created. All logs stored in files of 24 hours.

**Reports** - Database, by Room, Type of Call, and Elapse Time

**Approvals** - FCC part15, (UL1069, CSA-Pending), RoHS Compliant



# Paging Interface Adapter

## SPECIFICATION SHEET

Model PIA3264


<b>Operating Voltage</b>	<b>12Volts DC (all units)</b>
<b>Maximum Operating Current</b>	<b>450mA</b>
<b>Operating Temperature</b>	<b>-40C to +85C</b>
<b>Serial Port Paging Protocol</b>	<b>Scope, Tap v1.8, WaveWare Comp2 with and without Alert type</b>
<b>FCC Approval</b>	<b>FCC Part 15</b>
<b>UL and Canadian Approval</b>	<b>UL 1069, CSA (pending)</b>
<b>RoHS</b>	<b>Compliant</b>
<b>Size</b>	<b>14 x 10 x 1.5 Inches</b>
<b>Weight</b>	
<b>Serial Port</b>	<b>RS232 9-Pin Male Sub "D"</b>
<b>Contact Input</b>	<b>Voltage or Voltage Free</b>
<b>Contact Input Voltage</b>	<b>6 – 50 Volts AC or DC</b>
<b>Programmable</b>	<b>RJ45 TCP Direct Connect, Local Area Network or Internet</b>
<b>Interconnect of Units</b>	<b>RJ45 Up to 8 Units via RS485 (total of 576 contacts)</b>

Made in USA



**LIMITED LIFETIME WARRANTY**



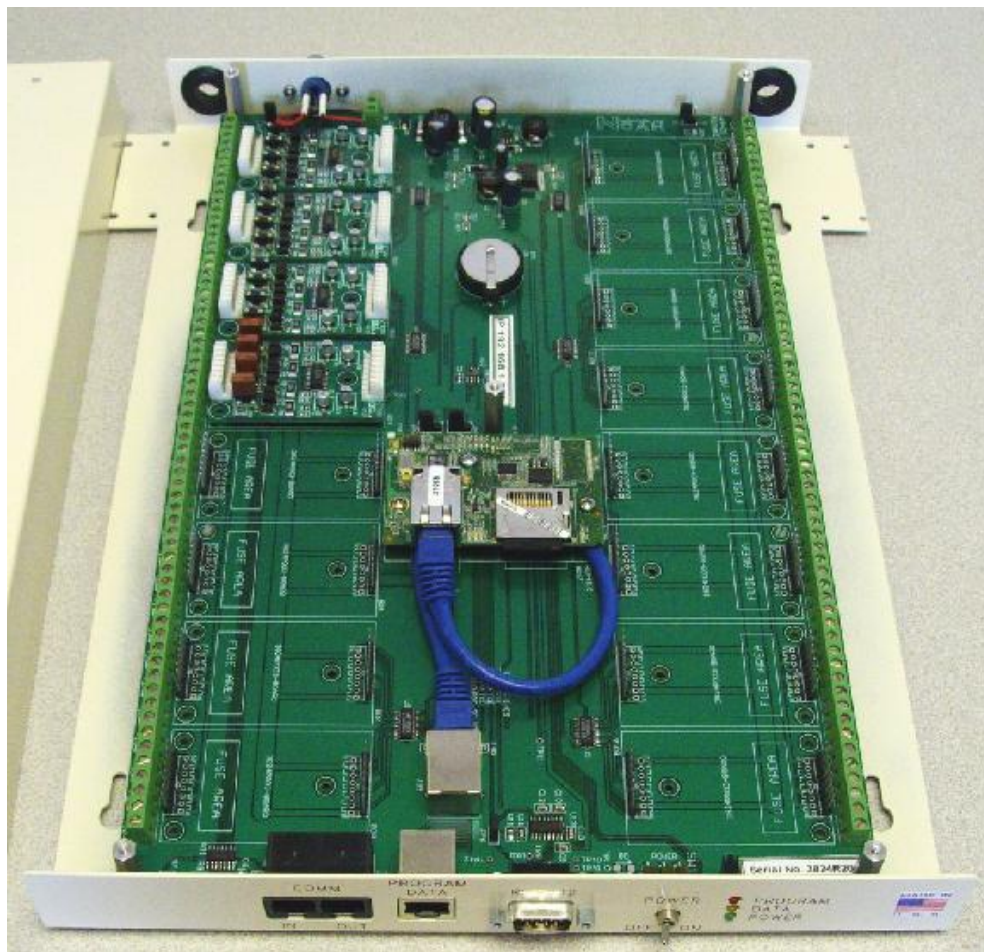

6801 Lake Worth Road – Suite 308 – Lake Worth, Florida 33467  
Tel 561.969.6976 – Fax 561.969.7134