


One / Two Line LED Sign

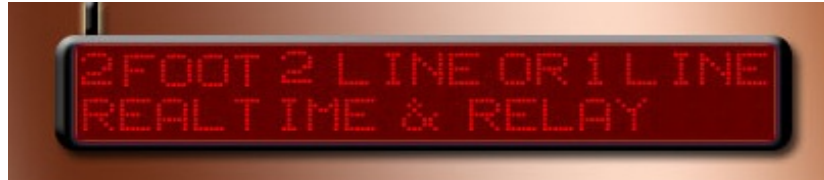

AS112(r)

Narrow Band and Wide Band Capable
Alpha LED display
10-40 characters per line depending on the mode
Display memory of 163,200 bytes
4.75" characters can be read at a distance of up to 200 feet
Display 10 to 40 characters per line depending on the mode
Real Time Clock
Wireless data input; provide 3 different data format:
Text mode:
Accepts 2,000 characters per message.
408-473MHz
512 / 1200 for POCSAG
25KHz
POCSAG
6 Capcodes for POCSAG
160 x 16
10/4.75
Case: 710 (L) x 160(H) x 70(W) mm
Approximately 3,865g

Features

- ▶ 6 Capcode Capacity
- ▶ Relay Control output Capcode (option)
- ▶ Paging Receiver Integrated – POCSAG
- ▶ Scroll or Fixed Message Display
- ▶ Clear Message by Reset Message or Set Time Out