

Paging Interface Adapter

PIA3264

comPPage's **PIA** is a 21st Century State of the Art Processor based interface unit with features **ONLY** offered by comPPage. With Storage of 1GB on a SD card that can be transferred to a PC. The **PIA** can be programmed using a stand alone PC with an Ethernet card or via the Local Area Network or Internet. The Paging Interface Adapter allows connection to Host units that output Dry Contact closure - N/o or N/C, Voltage output - High or Low, up to 64 inputs per unit with the ability to connect 8 additional units of 64 each using RS485 or Local Area Network. The unit also supports two rates of pulsing inputs. You can setup Voltage or Dry contact input. The **Paging Interface Adapter** uses a Web Based programming interface. No software to Load. Stores all alarm logs, reports, and contact program information on a 1GB removable SD Micro card. Reports include Elapse time for each alarm. The Paging Interface Adapter is **Designed** and **Manufactured** in the **US** and carries a **LIMITED LIFE TIME WARRANTY**. You only need to purchase Once.

Programming interface - Web Browser with Connection to Local Area Network, Direct Connect to Unit or Internet connect using TCP/IP. Enter new data, Find and Edit current data. Print Reports.

Setup Options - Paging Protocol - Scope, Motorola Tap V1.8, WaveWare
Motorola Comp2 (with and without Alert Type)
Pulsing Input - AiPhone, Cornell, Engineered Electronics, Heritage Medcall
Tektone. Dukane.
Inputs - Voltage High or Low and Non-Voltage Normally Open and Closed
Escalation Level - 3 Levels
Shifts - 3
Global Pager ID - 2
Slave Units -8 (RS485 or TCP/IP LAN)
Output - RS232 to Paging Encoder
System Health Check and Time Period 2,5,15 minutes, 1 or 2 hours

Contact Input - 16 inputs standard, addition inputs of 4 per logic card.
Total Contact Input - 576
Voltage, Non-Voltage or Mixed
Voltage Input 6 - 50 Volts AC/DC
Fused Input Protection for Non-Voltage input

Contact Program - Individual Pager ID or Group ID
Individual Repeats and Intervals or Repeat till Reset
4 Messages - Alert, Pulsing 1, Pulsing 2, Reset
Maximum of 240 Characters per message
Shift Schedule Pager IDs

Storage - Log all alarms created. Logs stored in files of 24 hours

Reports - Database, by Room, Type of Call, and Elapse Time


Approvals - FCC part15, UL1069, CSA and RoHS Compliant



Paging Interface Adapter


SPECIFICATION SHEET

Model PIA3264

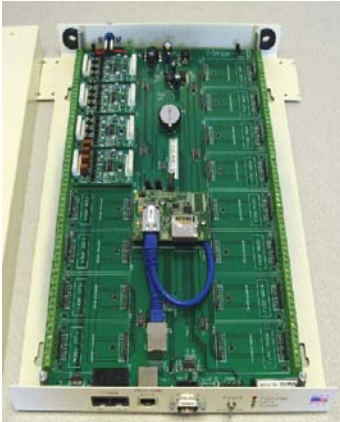

Operating Voltage	12Volts DC (all units)
Maximum Operating Current	2A
Operating Temperature	-40C to +85C
Serial Port Paging Protocol	Scope, Tap v1.8, WaveWare Comp2 with and without Alert type
FCC Approval	FCC Part 15
UL and Canadian Approval	UL 1069 2007/10/12 Ed: 7, CSA C22.2#205
RoHS	Compliant
Size	14 x 10 x 1.5 Inches
Weight	
Serial Port	RS232 9-Pin Male Sub "D"
Contact Input	Voltage or Voltage Free
Contact Input Voltage	6 – 50 Volts AC or DC
Programmable	RJ45 TCP Direct Connect, Local Area Network or Internet
Interconnect of Units	RJ45 via RS485 8 Slaves Maximum RJ45 via Local Area Network. 8 Slaves maximum.

Made in USA



LIMITED LIFETIME WARRANTY

